
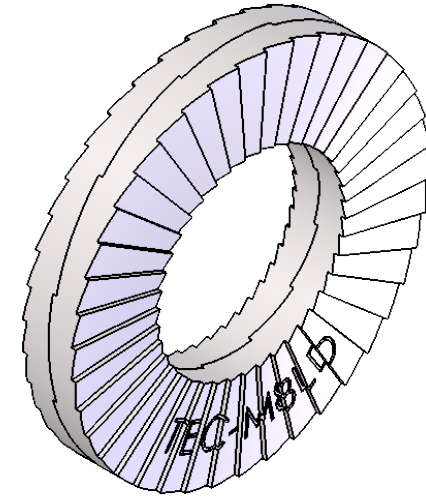
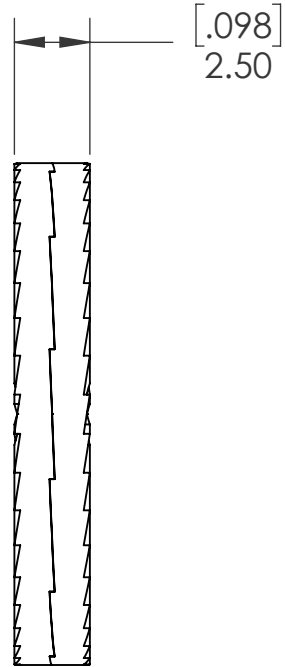



| REVISIONS | | | |
|-----------|-----------------|-----------|------|
| REV. | DESCRIPTION | DATE | ECN |
| A | INITIAL RELEASE | 6/20/17 | 2705 |
| B | MATERIAL UPDATE | 7/12/2018 | 3056 |

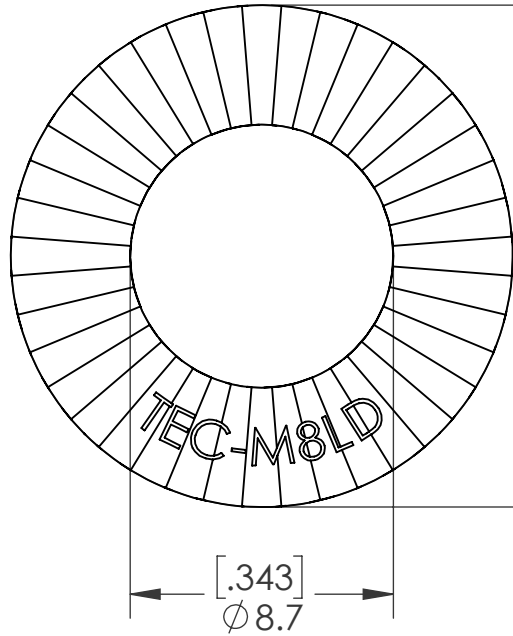

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.
 SHEREX FASTENING SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

DRAWING NO.:
TEC-M8LD

| | | | | |
|--|--|--|------|--|
| UNLESS OTHERWISE SPECIFIED: | | NAME | DATE |  TECSERIES <small>A SHEREX FASTENING SOLUTIONS® PRODUCT</small> |
| DIMENSIONS ARE IN MM (INCHES) TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 I.D. TOLERANCE: ± 0.1 [±.004] O.D. TOLERANCE: ± 0.2 [±.008] THICKNESS TOLERANCE: ± 0.25 [±.01] | | DRAWN | MTB | |
| INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994 | | CHECKED | | |
| MATERIAL | | ENG APPR. | JVK | 6/20/17 |
| SCM435 OR 4130 STEEL, HT: THROUGH HARDEN 465 HV MIN | | MFG APPR. | | |
| FINISH | | Q.A. | | |
| DELTA PROTEKT BASE COAT (KL100) & TOP COAT (VH302GZ) | | COMMENTS: | | DESCRIPTION: LARGE DIAMETER TEC WASHER GLUED PAIR 8MM, 5/16" |
| DO NOT SCALE DRAWING | | E-mail: info@disc-lock.com www.disc-lock.com Phone: 866-474-3739 Fax: 716-875-0358 | | |
| | | SIZE PART NO.: | | REV |
| | | A TEC-M8LD | | B |
| | | SCALE: 4:1 WEIGHT: | | SHEET 1 OF 1 |