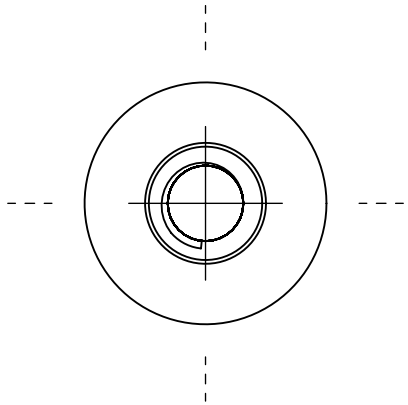

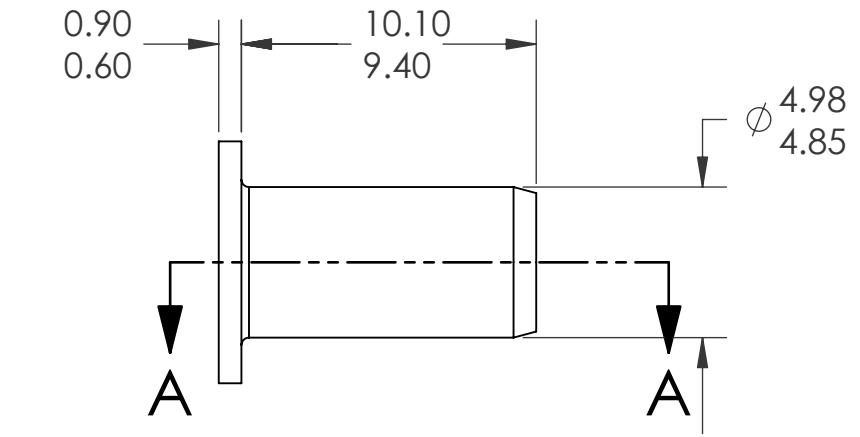

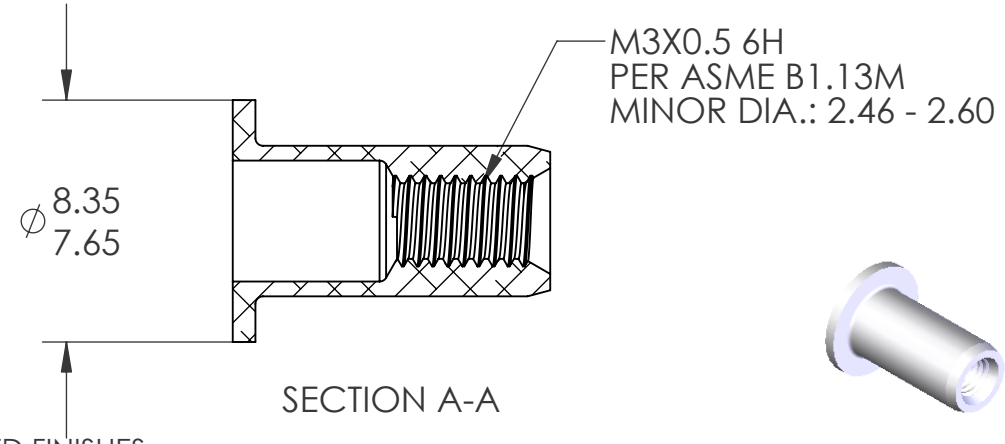

SECTION A-A

NOTE:
1. GRIP RANGE: 0.5 - 2.0
2. HOLE SIZE: 5.1 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: MS 50 SPIN PULL

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN MILIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JVK	3/5/08
			CHECKED		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JVK	3/5/08
			MFG APPR.	TB	8/7/08
		MATERIAL ALUMINUM ALMG 2.5 DIN 3.3523	Q.A.		
			COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358		
NEXT ASSY	USED ON	FINISH NONE			
APPLICATION		DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING, AND THE INFORMATION CONTAINED HERIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.

SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

TITLE:
FLAT HEAD OPEN END

SIZE	DWG. NO.	REV
A	TU-AM3UPO20	A

SCALE: 2:1	WEIGHT:.0004 kg	SHEET 1 OF 1

5 4 3 2 1