
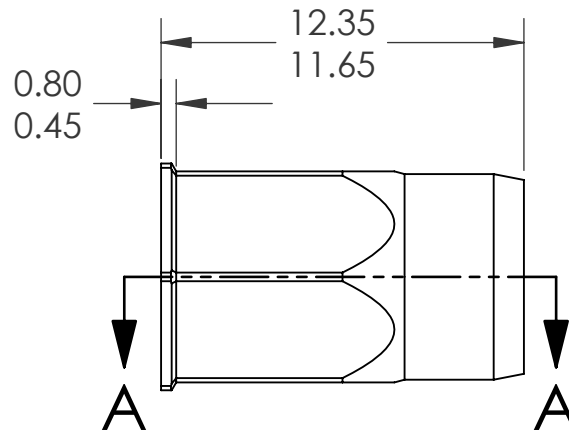



SECTION A-A

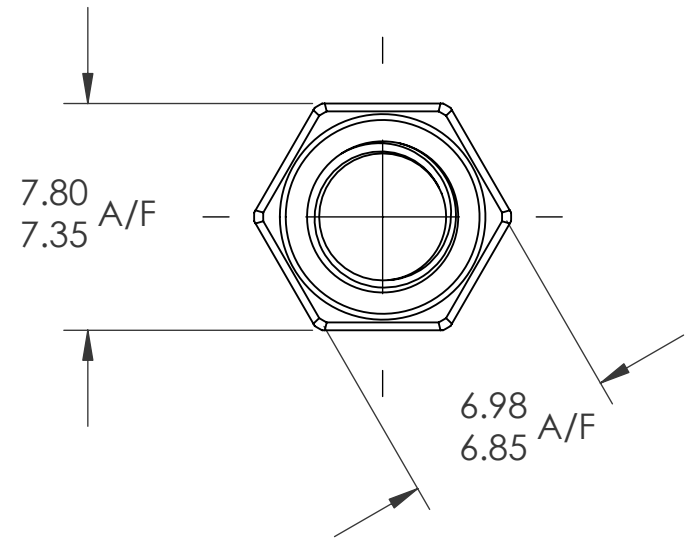

M5X0.8 6H
PER ASME B1.13M
MINOR DIA.: 4.13 - 4.33

NOTE:

1. GRIP RANGE: 0.5 - 3.0
2. HOLE SIZE: 7.0 +0.1/-0.0 A/F AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: MS 50 SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JVK	3/20/08				
			CHECKED						
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	ENG APPR.	JVK	3/20/08	TITLE: LOW PROFILE HEAD SEMI HEX			
			MFG APPR.	TB	8/25/08				
		MATERIAL 304 STAINLESS	Q.A.			SIZE DWG. NO. REV A TU-SSM5HUKO30 A			
			COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358						
		FINISH PASSIVATE							
NEXT ASSY	USED ON								
APPLICATION		DO NOT SCALE DRAWING	SCALE: 2:1				WEIGHT: .0015 kg	SHEET 1 OF 1	